


銅線用絶縁被覆付圧着端子 丸形端子 (RBV形) (RBA形)

JIS JQ0608003

UL E74917

SF 66230

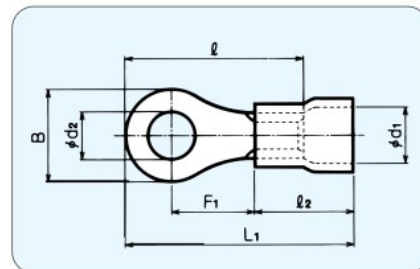

◆拡管形

RoHS 指令対応品

規格	呼び ビニル	各部の寸法								標準色	適合電線範囲		適合工具	一箱入数	
		φd ₂	B	φd ₁	F ₁	l ₂	l	L ₁	板厚		撚線mm ²	AWG			
UL	RBV3.5-S4	4.3	7.0		8.3		17.1	25.3			2.63	12	*DS-Hi5 *DH-1B *DS-A5	300 (100×3)	
UL	RBV3.5-4		8.5												
UL	RBV3.5-5	5.3	12.0	6.0	10.5	13.5	21.8	30.0	1.0	黄*	}				
UL	RBV3.5-6	6.4	14.5	12.5	25.0	33.2									
UL	RBV3.5-8	8.4	20.0	15.7	31.0	39.2					4.6				200 (100×2)
UL	RBV3.5-10	10.5													
UL	RBV3.5-12	13.0													
UL	RBV5.5-V3	3.2	7.2		8.5		15.8	23.0							
UL	RBV5.5-M3		7.1												
UL	RBV5.5-V3.5	3.7	7.2		8.5		15.8	23.0							
UL	RBV5.5-3.5		7.7												
UL	RBV5.5-M3.5	4.3	7.1		8.5		18.3	25.5							
UL	RBV5.5-V4		7.2												
UL	RBV5.5-S4	4.4	7.7		8.5		17.3	24.5							
UL	RBV5.5-N4		8.0												
UL	RBV5.5-M4	4.3	7.1		8.5		18.8	26.0							
UL	RBV5.5-4 (RBA5.5-4)		9.5												
JIS	UL	RBV5.5-S5	5.3	6.4	13.5		19.5	26.7	1.0	黄*	}	12-10	*DS-Hi5 *DH-1B *DS-A5	300 (100×3)	
UL	RBV5.5-5 (RBA5.5-5)	8.0													
UL	RBV5.5-L5	6.4	12.0		10.2		22.5	29.7							
UL	RBV5.5-S6		9.5												
JIS	UL	RBV5.5-6 (RBA5.5-6)	6.4	12.0		10.2		19.5	26.7						
UL	RBV5.5-L6	14.0													
UL	RBV5.5-A6	8.4	15.0		16.0		26.3	33.5							
JIS	UL														RBV5.5-8 (RBA5.5-8)
JIS	UL	RBV5.5-10 (RBA5.5-10)	10.5				27.3	34.5							
UL	RBV5.5-12	13.0													
UL	RBV5.5-14	15.0	32.0		25.7		48.0	55.2							
UL	RBV5.5-16														17.0
UL	RBV5.5-20	21.0												100	

1. 各呼びの印は、JIS規格品、UL登録品、CSA登録品です。()はJIS規格品の呼びを示します。
 2. CSA登録品としてご使用の際は、注文時にご指示ください。カートンがCSA品用となります。
 3. 上記寸法表にかぎらず特注品もご相談ください。
 4. *印はUL適合工具です。
- ※…表の絶縁被覆のカラーは、あくまで標準色です。ご用意できるカラーはP.20をご参照下さい。