



銅線用絶縁被覆付圧着端子

# 丸先開形端子

〈AVRF形〉〈APRF形〉  
〈BVRF形〉〈BPRF形〉



RoHS 指令対応品

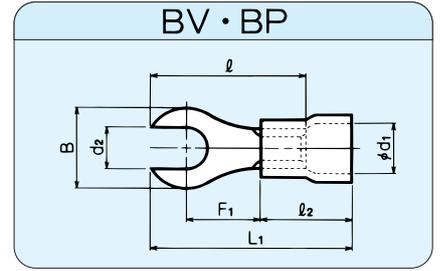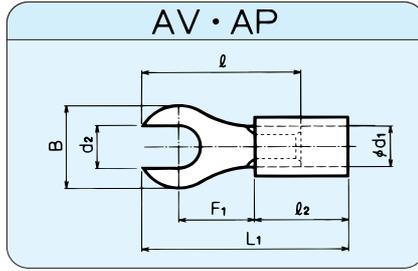

呼 び	規格	呼 び	規格	各 部 の 寸 法								標準色	適合電線範囲		適合工具	一箱入数	
				ビニル	ナイロン	d <sub>2</sub>	B	φd <sub>1</sub>	F <sub>1</sub>	l <sub>2</sub>	l		L <sub>1</sub>	板厚			燃線mm
ストレート形	UL	AVRF1.25-3	UL	APRF1.25-3	3.2	5.5	3.3	4.8	9.5	11.7	16.7	0.8	赤	0.5	20-16	3号D 34号, 34S DH-1B AC-5N-D	500 (100×5)
	UL	AVRF1.25-3.5	UL	APRF1.25-3.5	3.7												
	UL	AVRF1.25-S4	UL	APRF1.25-S4	4.3	8.0	7.5	13.3	18.3	15.3	20.3						
	UL	AVRF1.25-4	UL	APRF1.25-4	4.3												
	UL	AVRF1.25-5	UL	APRF1.25-5	5.3	5.5	3.9	5.1	9.5	11.7	16.7						
	UL	AVRF2-M3	UL	APRF2-M3	3.2												
	UL	AVRF2-3	UL	APRF2-3	6.5	8.2	8.6	12.3	17.3	16.3	21.3						
	UL	AVRF2-4	UL	APRF2-4	4.3												
	UL	AVRF2-5	UL	APRF2-5	5.3	9.5	5.4	8.8	14.0	19.2	26.9						
	UL	AVRF5.5-4	UL	APRF5.5-4	4.3												
UL	AVRF5.5-5	UL	APRF5.5-5	5.3	9.5	6.4	8.8	13.5	18.9	26.6							
UL	AVRF5.5-5	UL	APRF5.5-5	5.3													
拡管形	UL	BVRF1.25-3	UL	BPRF1.25-3	3.2	5.5	4.1 (4.0)	4.8	9.0	11.7	16.2	0.8	赤	0.5	20-16	3号D 34号, 34S DH-1B AC-5N-D	500 (100×5)
	UL	BVRF1.25-3.5	UL	BPRF1.25-3.5	3.7												
	UL	BVRF1.25-S4	UL	BPRF1.25-S4	4.3	8.0	7.5	13.3	17.8	15.3	19.8						
	UL	BVRF1.25-4	UL	BPRF1.25-4	4.3												
	UL	BVRF1.25-5	UL	BPRF1.25-5	5.3	5.5	4.7 (4.5)	5.1	9.0	11.7	16.2						
	UL	BVRF2-M3	UL	BPRF2-M3	3.2												
	UL	BVRF2-3	UL	BPRF2-3	6.5	8.2	8.6	12.3	16.8	16.3	20.8						
	UL	BVRF2-4	UL	BPRF2-4	4.3												
	UL	BVRF2-5	UL	BPRF2-5	5.3	9.5	6.4	8.8	13.5	19.2	26.4						
	UL	BVRF5.5-4	UL	BPRF5.5-4	4.3												
UL	BVRF5.5-5	UL	BPRF5.5-5	5.3	9.5	6.4	8.8	13.5	18.9	26.1							
UL	BVRF5.5-5	UL	BPRF5.5-5	5.3													

1. 各呼びの印は、UL登録品、CSA登録品です。
2. CSA登録品としてご使用の際は、注文時にご指示ください。カートンがCSA品用となります。
3. ( ) は、BPRF形の寸法です。



銅線用絶縁被覆付圧着端子

# 横開形端子

〈AVHY形〉〈APHY形〉  
〈BVHY形〉〈BPHY形〉



RoHS 指令対応品

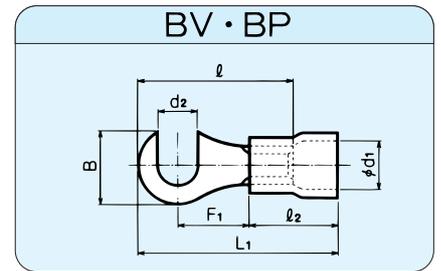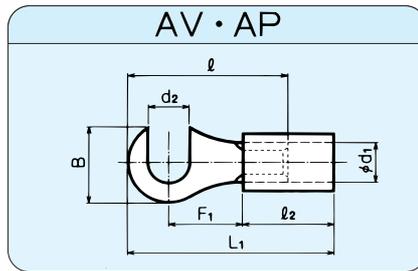

呼 び	規格	呼 び	規格	各 部 の 寸 法								標準色	適合電線範囲		適合工具	一箱入数	
				ビニル	ナイロン	d <sub>2</sub>	B	φd <sub>1</sub>	F <sub>1</sub>	l <sub>2</sub>	l		L <sub>1</sub>	板厚			燃線mm
ストレート形	UL	AVHY1.25-3	UL	APHY1.25-3	3.2	5.0	3.3	5.0	9.5	12.2	17.2	0.8	赤	0.5	20-16	3号D 34号, 34S DH-1B AC-5N-D	500 (100×5)
	UL	AVHY1.25-4	UL	APHY1.25-4	4.3												
	UL	AVHY1.25-5	UL	APHY1.25-5	5.3	7.0	7.3	15.8	20.8	17.0	22.0						
	UL	AVHY2-4	UL	APHY2-4	4.3												
	UL	AVHY2-5	UL	APHY2-5	5.3												
拡管形	UL	BVHY1.25-3	UL	BPHY1.25-3	3.2	5.0	4.1 (4.0)	5.0	9.0	12.2	16.7	0.8	赤	0.5	20-16	3号D 34号, 34S DH-1B AC-5N-D	500 (100×5)
	UL	BVHY1.25-4	UL	BPHY1.25-4	4.3												
	UL	BVHY1.25-5	UL	BPHY1.25-5	5.3	7.0	7.3	15.8	20.3	17.0	21.5						
	UL	BVHY2-4	UL	BPHY2-4	4.3												
	UL	BVHY2-5	UL	BPHY2-5	5.3	9.5	4.5 (4.5)	8.3	9.0	17.5	22.0						
	UL	BVHY2-5	UL	BPHY2-5	5.3												

1. 各呼びの印は、UL登録品、CSA登録品です。
2. CSA登録品としてご使用の際は、注文時にご指示ください。カートンがCSA品用となります。
3. ( ) は、BPHY形の寸法です。