

NK50B




●ご注文表記例

NK50B 20

TYPE 歯数

スプロケットNo.

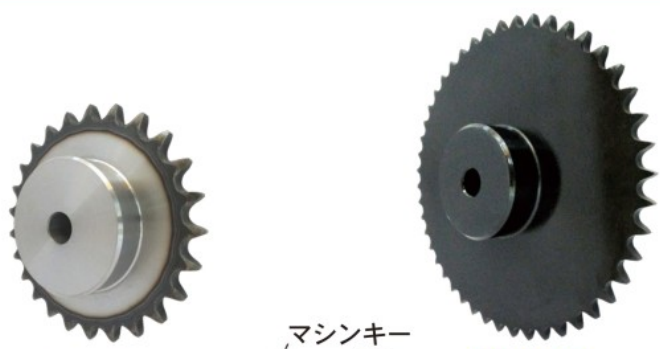

削出仕様

溶接仕様



KANAマシンキーを併せて
ご利用ください。P436-437参照

- チェーンNo.50
- チェーンピッチ(P)15.875mm
- ローラリンク内幅(W) 9.53 mm
- ローラ外径(Dr)10.16 mm
- 歯幅(T) 8.7 mm

| TYPE | 歯数 | 外径 Do | ピッチ径 Dp | 軸穴径 d | | | ボス径 BD | ボス長さ BL | 形状 | 歯部 | 重量 kg | 定価 (円) | Semi-F 定価(円) |
|-----------|-----|----------|------------|-------|----|------|-----------|------------|-------|----------------------------|----------|-----------|-----------------|
| | | | | 下穴 | 最小 | 最大 | | | | | | | |
| NK 50B | 8 | 48 | 41.48 | 10 | 11 | 13.5 | ★30 | 25 | 削出仕様 | h m 歯先高周波焼入 機械構造用炭素鋼 | 0.12 | 550 | 3,100 |
| | 9 | 53 | 46.42 | 10 | 11 | 18 | ★34 | 25 | | | 0.20 | 530 | 3,000 |
| | 10 | 58 | 51.37 | 10 | 11 | 22 | ★40 | 25 | | | 0.27 | 520 | 2,800 |
| | 11 | 64 | 56.35 | 12 | 13 | 28 | ★45.5 | 25 | | | 0.33 | 600 | 2,900 |
| | 12 | 69 | 61.34 | 12 | 13 | 30 | ★50 | 25 | | | 0.41 | 580 | 2,800 |
| | 13 | 74 | 66.34 | 12 | 13 | 32 | ★51 | 25 | | | 0.46 | 650 | 2,900 |
| | 14 | 79 | 71.34 | 12 | 13 | 32 | 52 | 25 | | | 0.52 | 650 | 2,900 |
| | 15 | 84 | 76.35 | 12 | 13 | 35 | 57 | 25 | | | 0.62 | 770 | 3,300 |
| | 16 | 89 | 81.37 | 14 | 15 | 40 | 62 | 25 | | | 0.72 | 860 | 3,400 |
| | 17 | 94 | 86.39 | 14 | 15 | 45 | 67 | 25 | | | 0.83 | 940 | 3,400 |
| | 18 | 100 | 91.42 | 14 | 15 | 48 | 72 | 28 | | | 1.00 | 1,100 | 3,600 |
| | 19 | 105 | 96.45 | 14 | 15 | 48 | 73 | 28 | | | 1.10 | 1,180 | 3,700 |
| | 20 | 110 | 101.48 | 14 | 15 | 48 | 73 | 28 | | | 1.20 | 1,220 | 3,700 |
| | 21 | 115 | 106.51 | 14 | 15 | 48 | 73 | 28 | | | 1.20 | 1,260 | 3,800 |
| | 22 | 120 | 111.55 | 16 | 17 | 48 | 73 | 28 | | | 1.30 | 1,380 | 3,900 |
| | 23 | 125 | 116.58 | 16 | 17 | 48 | 73 | 28 | | | 1.30 | 1,460 | 4,300 |
| | 24 | 130 | 121.62 | 16 | 17 | 48 | 73 | 28 | | | 1.40 | 1,540 | 4,400 |
| | 25 | 135 | 126.66 | 16 | 17 | 48 | 73 | 28 | | | 1.50 | 1,630 | 4,500 |
| | 26 | 140 | 131.70 | 16 | 17 | 48 | 73 | 28 | | | 1.50 | 1,870 | 4,700 |
| | 27 | 145 | 136.74 | 16 | 17 | 48 | 73 | 28 | | | 1.50 | 1,950 | 4,800 |
| 28 | 150 | 141.79 | 16 | 17 | 48 | 73 | 28 | 1.60 | 2,070 | 5,300 | | | |
| 29 | 155 | 146.83 | 16 | 17 | 48 | 73 | 28 | 1.70 | 2,170 | 5,400 | | | |
| 30 | 161 | 151.87 | 16 | 17 | 48 | 73 | 28 | 1.80 | 2,110 | 5,300 | | | |
| 31 | 166 | 156.92 | 16 | 17 | 48 | 73 | 28 | 1.85 | 2,480 | 5,700 | | | |
| 32 | 171 | 161.96 | 16 | 17 | 48 | 73 | 28 | 1.90 | 2,310 | 5,500 | | | |
| 33 | 176 | 167.01 | 16 | 17 | 48 | 73 | 28 | 2.00 | 2,600 | 5,800 | | | |
| 34 | 181 | 172.05 | 16 | 17 | 48 | 73 | 28 | 2.10 | 2,710 | 6,000 | | | |
| 35 | 186 | 177.10 | 16 | 17 | 48 | 73 | 28 | 2.20 | 2,800 | 6,000 | | | |
| 36 | 191 | 182.14 | 19 | 20 | 55 | 83 | 35 | 2.85 | 3,330 | 7,200 | | | |
| 37 | 196 | 187.19 | 19 | 20 | 55 | 83 | 35 | 2.95 | 4,080 | 8,500 | | | |
| 38 | 201 | 192.24 | 19 | 20 | 55 | 83 | 35 | 3.05 | 3,570 | 7,500 | | | |
| 39 | 206 | 197.29 | 19 | 20 | 55 | 83 | 35 | 3.15 | 4,400 | 8,800 | | | |
| 40 | 211 | 202.33 | 19 | 20 | 55 | 83 | 35 | 3.25 | 3,610 | 7,500 | | | |