



ハーフサイドスロットミル



■ ボスなし 左勝手

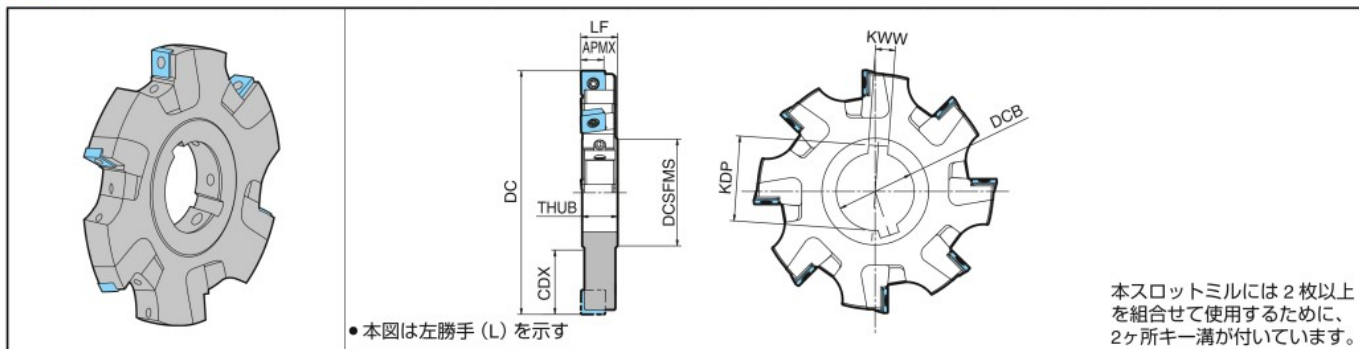

本スロットミルには2枚以上を組合せて使用するために、2ヶ所キー溝が付いています。

● ホルダ寸法 (ミリ仕様)

型番	在庫	刃数	寸法 (mm)										重量 (kg)	最高回転数 (min ⁻¹)										
			DC	DCB (H7)	DCSFMS	THUB	LF		CDX	APMX (max.)	KDP	KWW												
MSTC 100AL1416-10-6T	○	6	100	32	46.8					25.9		34.8	8	0.5	17,250									
125AL1416-10-8T	○	8	125	40	54.8	13.9	13.9	14.9	34.4	9.1	43.5	10			0.8	15,450								
160AL1416-10-10T	○	10	160														51.9							
MSTC 125AL1618-10-8T	○	8	125														34.4							
160AL1618-10-10T	○	10	160							51.9														
MSTC 125AL1820-12-8T	○	8	125							15.9							15.9	16.9	34.0	11.7	1.0	13,650		
160AL1820-12-10T	○	10	160							51.9														
MSTC 125AL2123-12-8T	○	8	125							18.2							18.1	19.4	34.0	11.7			1.0	10,350
160AL2123-12-10T	○	10	160							51.5														
MSTC 125AL2123-12-8T	○	8	125	20.8	20.7	22.0	34.0	11.7	1.2	10,350														
160AL2123-12-10T	○	10	160	51.5																				

● ホルダ寸法 (インチ仕様)

型番	在庫	刃数	寸法 (inch)										重量 (kg)	最高回転数 (min ⁻¹)										
			DC	DCB (H7)	DCSFMS	THUB	LF		CDX	APMX (max.)	KDP	KWW												
MSTC 400AL551-630-10	○	6	4.000 (101.6mm)	1.250 (31.75mm)	1.880 (47.75mm)					1.030 (26.1mm)		1.386 (35.2mm)	.312 (7.92mm)	0.6	17,100									
500AL551-630-10	○	8	5.000 (127.0mm)	1.500 (38.1mm)	2.250 (57.15mm)	.545 (13.84mm)	.548 (13.9mm)	.588 (14.9mm)	1.345 (34.1mm)	.359 (9.1mm)	1.665 (42.3mm)	.375 (9.52mm)			0.9	15,300								
600AL551-630-10	○	10	6.000 (152.4mm)														1.845 (46.8mm)							
MSTC 500AL630-709-10	○	8	5.000 (127.0mm)														1.345 (34.1mm)							
600AL630-709-10	○	10	6.000 (152.4mm)							1.845 (46.8mm)														
MSTC 500AL709-813-12	○	8	5.000 (127.0mm)							.624 (15.85mm)							.627 (15.9mm)	.667 (16.9mm)	1.331 (33.8mm)	.461 (11.7mm)	1.1	10,300		
600AL709-813-12	○	10	6.000 (152.4mm)							1.831 (46.5mm)														
MSTC 500AL813-917-12	○	8	5.000 (127.0mm)							.716 (18.2mm)							.712 (18.1mm)	.764 (19.4mm)	1.331 (33.8mm)	.461 (11.7mm)			1.7	9,400
600AL813-917-12	○	10	6.000 (152.4mm)							1.831 (46.5mm)														
MSTC 500AL813-917-12	○	8	5.000 (127.0mm)	.820 (20.8mm)	.816 (20.7mm)	.868 (22.0mm)	1.331 (33.8mm)	.461 (11.7mm)	1.3	10,300														
600AL813-917-12	○	10	6.000 (152.4mm)	1.831 (46.5mm)																				

M

ミーリング

- チップ
- コーナ角 45°~20°
- コーナ角 15°
- コーナ角 0°/2°
- 高送りカッタ
- 仕上げ加工用カッタ
- 3次元エンドミル
- スロットミル
- ボールラジラス
- その他

○：標準在庫 (在庫をご確認ください)