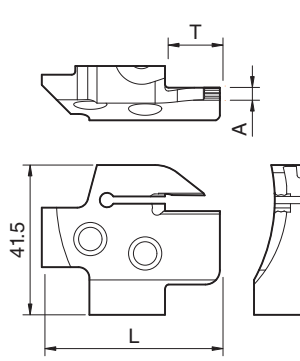


端面溝入れブレード

● ブレード寸法

形 状	ブレード型番	在庫		寸法 (mm)			端面溝外径 (mm)		刃幅 (mm)	適合チップ ●G89	ホルダ本体型番 ●G35						
							DAXN [MIN.]	DAXX [MAX.]									
		R	L	L	T	A			CW								
 本図は右勝手 (R) を示す	KGDFR	-25-2A-C	●	-	44.35	6	1.5	25	30	2	GDFM 2020N-020GM						
		-30-2A-C	●	-				30	35								
		-35-2A-C	●	-				35	45								
		-45-2A-C	●	-				45	60								
		-60-2A-C	●	-				60	80								
		-80-2A-C	●	-				80	100								
		-100-2A-C	●	-				100	130								
		-25-2B-C	●	-	47.35	13		1.5	25				30				
		-30-2B-C	●	-					30				35				
		-35-2B-C	●	-					35				45				
		-45-2B-C	●	-					45				60				
		-60-2B-C	●	-					60				80				
		-80-2B-C	●	-					80				100				
		-100-2B-C	●	-					100				130				
	KGDF ^{R/L}	-25-3A-C	●	●	47.35	13	2		25	30	3		GDFM 3020N-030GM GDFM 3020N-030DM GDFMS 3020N-030DM GDFM3020N-150R-CM				
		-30-3A-C	●	●					30	40							
		-40-3A-C	●	●					40	50							
		-50-3B-C	●	●	49.35	15			50	65							
		-65-3B-C	●	●					65	85							
		-85-3B-C	●	●					85	110							
		-110-3B-C	●	●					110	145							
		-50-3C-C	●	●	56.35	22		50	65								
		-65-3C-C	●	●				65	85								
		-85-3C-C	●	●				85	110								
		-110-3C-C	●	●	59.35	25		110	145								
	KGDF ^{R/L}	-25-4A-C	●	●	49.35	15	3	25	35	4	GDFM 4020N-040GM GDFM 4020N-040GH GDFM 4020N-040DM GDFMS 4020N-040DM GDFM4020N-200R-CM						
		-35-4B-C	●	●				35	50								
		-50-4B-C	●	●				50	70								
		-70-4B-C	●	●				70	100								
		-100-4B-C	●	●				100	150								
		-150-4B-C	●	●				150	220								
		-220-4B-C	●	●	59.35	25		220	∞								
		-35-4C-C	●	●				35	50								
		-50-4C-C	●	●				50	70								
		-70-4C-C	●	●				70	100								
		-100-4C-C	●	●				100	150								
		-150-4C-C	●	●				150	220								
	KGDF ^{R/L}	-220-4C-C	●	●	49.35	15		220	∞	5	GDFM 5020N-040GM GDFM 5020N-080GM GDFM 5020N-040GH GDFM 5020N-080GH GDFM 5020N-040DM GDFMS 5020N-040DM GDFM5020N-250R-CM						
		-25-5B-C	●	●				25	35								
		-35-5B-C	●	●				35	50								
		-50-5B-C	●	●				50	75								
		-75-5B-C	●	●				75	115								
		-115-5B-C	●	●				115	180								
		-180-5B-C	●	●	54.35	20		180	235								
		-235-5B-C	●	●				235	∞								
		-25-5C-C	●	●	59.35	25		25	35								
		-35-5C-C	●	●				35	50								
		-50-5C-C	●	●				50	75								
		-75-5C-C	●	●				75	115								
		-115-5C-C	●	●				115	180								
		-180-5C-C	●	●				180	235								
	KGDF ^{R/L}	-235-5C-C	●	●	66.35	32		235	∞	6	GDFM 6020N-040GM GDFM 6020N-080GM GDFM 6020N-040GH GDFM 6020N-080GH GDFM 6020N-040DM GDFMS 6020N-040DM GDFM6020N-300R-CM						
		-75-5D-C	●	●				75	115								
		-115-5D-C	●	●				115	180								
		-180-5D-C	●	●				180	235								
		-235-5D-C	●	●				235	∞								
		KGDF ^{R/L}	-25-6B-C	●	●	49.35		15	5				25	35	6	GDFM 6020N-040GM GDFM 6020N-080GM GDFM 6020N-040GH GDFM 6020N-080GH GDFM 6020N-040DM GDFMS 6020N-040DM GDFM6020N-300R-CM	
			-35-6B-C	●	●								35	50			
			-50-6B-C	●	●								50	75			
			-75-6B-C	●	●								75	115			
			-115-6B-C	●	●								115	180			
			-180-6B-C	●	●								180	235			
			-235-6B-C	●	●								235	∞			
			-25-6C-C	●	●	54.35		20					25	35			
			-35-6C-C	●	●								35	50			
			-50-6C-C	●	●								50	75			
			-75-6C-C	●	●	59.35		25					75	115			
			-115-6C-C	●	●								115	180			
			-180-6C-C	●	●								180	235			
	-235-6C-C		●	●	235								∞				
	-75-6D-C	●	●	66.35	32								75	115			
	-115-6D-C	●	●										115	180			
	-180-6D-C	●	●					180					235				
	-235-6D-C	●	●	235	∞												

● : 標準在庫

チップ材種 旋削チップ CBNダイヤモンド 外径 スモールツール 内径 溝入れ 突切り ねじ切り ドリル ソリッドツール ミーリング ツーリング 機器 イジヤヤシズ 部品 技術資料 SICKセリックス 索引