


# マジックドリルDRZ

**DRZ**(加工深さ : 5 x DC)

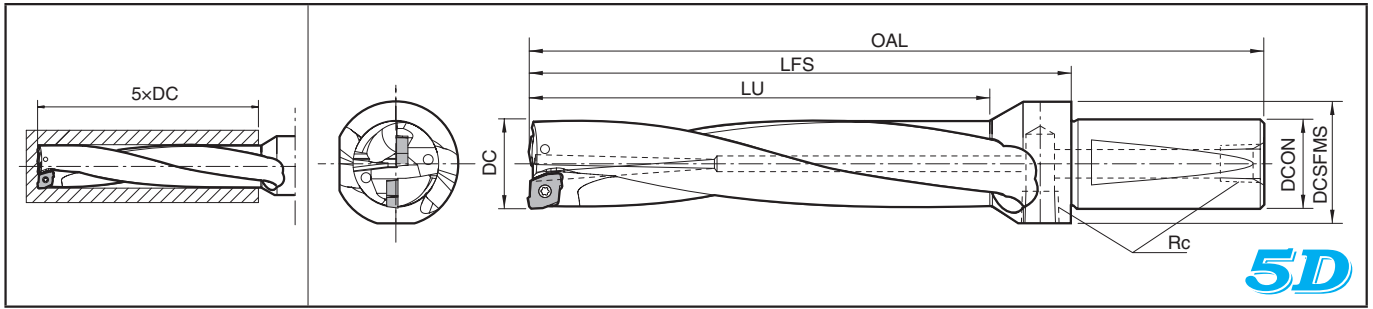

● **ホルダ寸法**

型番	在庫	刃数	寸法 (mm)							半径方向 オフセット 可能範囲 (mm)	部品			適合チップ ● <b>K55</b>																											
			DC	OAL	LFS	LU	DCON	DCSFMS	Rc		クランプスクリュー	レンチ	プラグ																												
<b>S32</b> -DRZ27135-10 -DRZ28140-10 -DRZ29145-10 -DRZ30150-10 -DRZ31155-10 -DRZ32160-10	● ● ● ● ● ●	2	27	227	168	135	32	Rc1/4	+2.5 +2.2 +2.0 +1.7 +1.5 +1.2	SB-4085TR	DT-15	GP-2	ZCMT10T304 ZCMT10T304SP																												
<b>S40</b> -DRZ33165-12 -DRZ34170-12 -DRZ35175-12 -DRZ36180-12 -DRZ37185-12 -DRZ38190-12 -DRZ39195-12 -DRZ40200-12	● ● ● ● ● ● ● ●	2	33	269	200	165								40	Rc1/4	+2.9 +2.7 +2.4 +2.2 +1.9 +1.7 +1.4 +1.2	SB-5085TR	DT-20	GP-2	ZCMT12T306 ZCMT12T304SP																					
-DRZ41205-15 -DRZ42210-15 -DRZ43215-15 -DRZ44220-15 -DRZ45225-15 -DRZ46230-15 -DRZ47235-15 -DRZ48240-15 -DRZ49245-15 -DRZ50250-15	● ● ● ● ● ● ● ● ● ●	2	41	306	237	205															40	Rc1/4	+4.0 +3.7 +3.5 +3.2 +3.0 +2.7 +2.5 +2.2 +2.0 +1.7	SB-5085TR	DT-20	GP-2	ZCMT150408 ZCMT150406SP														
																												55	Rc1/4	+3.0 +2.7	SB-5085TR	DT-20	GP-2	ZCMT150408 ZCMT150406SP							
																																			60	Rc1/4	+2.5 +2.2 +2.0 +1.7	SB-5085TR	DT-20	GP-2	ZCMT150408 ZCMT150406SP
																												55	Rc1/4	+3.0 +2.7	SB-5085TR	DT-20	GP-2	ZCMT150408 ZCMT150406SP							
							60	Rc1/4	+2.5 +2.2 +2.0 +1.7	SB-5085TR	DT-20	GP-2	ZCMT150408 ZCMT150406SP																												
																												55	Rc1/4	+3.0 +2.7	SB-5085TR	DT-20	GP-2	ZCMT150408 ZCMT150406SP							

・オフセット加工する場合は、送りを  $f=0.05\text{mm/rev}$  以下に設定してください。  
 ・偏心スリーブ (SHE) は、**K51**をご参照ください。

推奨切削条件 ● **K67**  
 トラブルシューティング ● **K54**

● **加工径の目安 (5Dタイプ)**

DC	加工公差 (mm)
φ27~φ40	+0.35 -0.15
φ41~φ50	+0.40 -0.20

※上記は目安の数値です。  
 機械 / 被削材 / クランプ状態 / 切削条件等で変動の可能性があります。

K

レンド

DRA

DRC

DRV

DRS

DRZ

DRX

DRW

ファイン  
マイクロ

● : 標準在庫