


ポリゴンテーパシャンク

KGD(溝入れ・突切り用ホルダ)

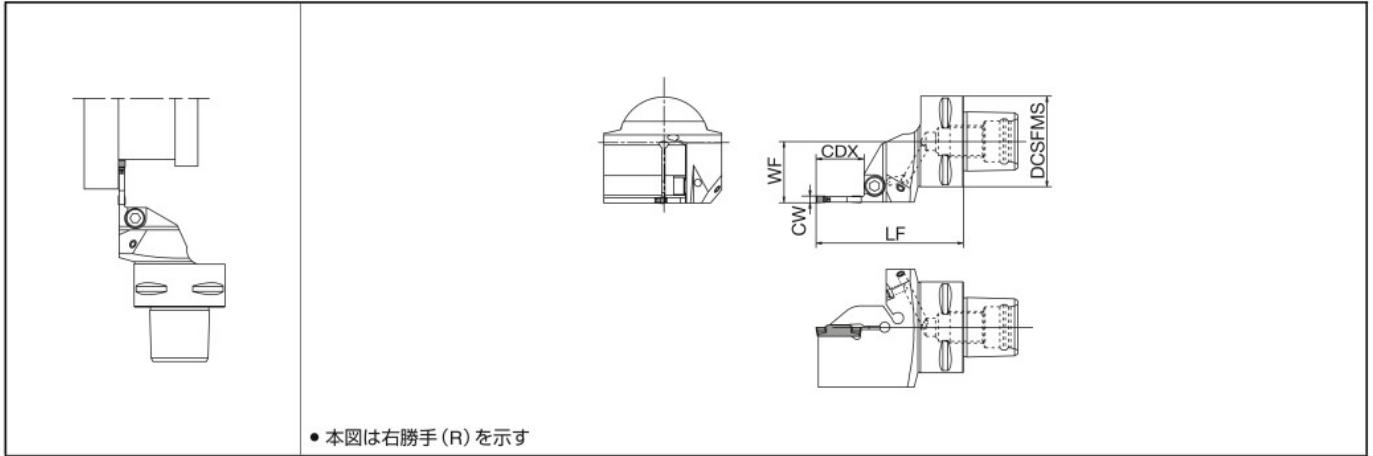

● 本図は右勝手 (R) を示す

● ホルダ寸法

溝幅 CW (mm)	加工 可能 深さ (mm)	型番	在庫		クーラントホール	寸法 (mm)				刃幅 CW (mm)		部品		適合チップ ● G26, G27 H18, H19
			R	L		DCSFMS	LF	WF	CDX	MIN.	MAX.	スクリュー	レンチ	
2	10	KPC3-KGD ^{R/L} 22050-2T10	●	●	有	32	50	22	10	2.0	3.0	HH5X16	LW-4	GDMタイプ GDGタイプ
		KPC4-KGD ^{R/L} 27055-2T10	●	●		40	55	27						
		KPC5-KGD ^{R/L} 35060-2T10	●	●		50	60	35						
	17	KPC3-KGD ^{R/L} 22055-2T17	●	●		32	55	22	17					
		KPC4-KGD ^{R/L} 27060-2T17	●	●		40	60	27						
		KPC5-KGD ^{R/L} 35060-2T17	●	●		50	60	35						
3	10	KPC3-KGD ^{R/L} 22050-3T10	●	●		32	50	22	10	3.0	4.0			
		KPC4-KGD ^{R/L} 27055-3T10	●	●		40	55	27						
		KPC5-KGD ^{R/L} 35060-3T10	●	●		50	60	35						
	20	KPC3-KGD ^{R/L} 22060-3T20	●	●		32	60	22	20					
		KPC4-KGD ^{R/L} 27065-3T20	●	●		40	65	27						
		KPC5-KGD ^{R/L} 35065-3T20	●	●		50	65	35						
4	10	KPC3-KGD ^{R/L} 22050-4T10	●	●		32	50	22	10	4.0	5.0			
		KPC4-KGD ^{R/L} 27055-4T10	●	●		40	55	27						
		KPC5-KGD ^{R/L} 35060-4T10	●	●		50	60	35						
	20	KPC4-KGD ^{R/L} 27065-4T20	●	●		40	65	27	20					
		KPC5-KGD ^{R/L} 35065-4T20	●	●		50	65	35						
		25	KPC4-KGD ^{R/L} 27070-4T25	●		●	40	70						
KPC5-KGD ^{R/L} 35070-4T25	●		●	50	70	35								
5	10	KPC4-KGD ^{R/L} 27055-5T10	●	●	40	55	27	10	5.0	6.0				
		KPC5-KGD ^{R/L} 35060-5T10	●	●	50	60	35							
	17	KPC4-KGD ^{R/L} 27060-5T17	●	●	40	60	27	17						
		KPC5-KGD ^{R/L} 35060-5T17	●	●	50	60	35							

*1. クーラント圧最大7MPa

*2. 推奨締付トルク 6.5N・m

*3. CDX : 加工可能溝深さを示します。(CDXが20mm以上の場合、2コーナ仕様チップによる最大溝深さは18mmとなります。)

● : 標準在庫