

製品情報



対象被削材




技術資料 >> 1995

ISO13399記号 >> 1966

マークの見方 >> 670

エンドミル選定目安表 >> 674



R	0.1 ≤ RE ≤ 3
	±0.01
DC	0.2 ≤ DC ≤ 6
	0 -0.02
h6	4 ≤ DCON ≤ 6
	0 -0.008

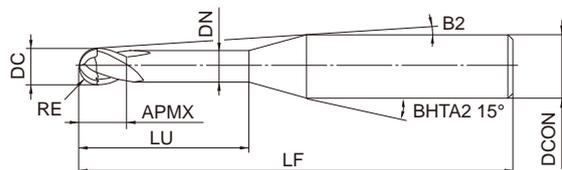


図1

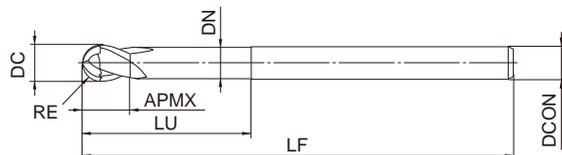


図2

- α : ワーク勾配角度, Lmax : 実有効首下長
- 下表右の実有効首下長は、「0:使用不可、空欄:干渉なし」を示します。

●標準在庫 単位:mm

呼び記号	RE	DC	APMX	LU	DN	B2	LF	DCON	刃数	在庫	図番	ワーク勾配角に対する 実有効首下長			
												0.5°	1°	2°	3°
CRN2XLB0010N005S04	0.1	0.2	0.2	0.5	0.17	14.1°	50	4	2	●	1	0.5	0.5	0.6	0.6
CRN2XLB0010N005S06	0.1	0.2	0.2	0.5	0.17	14.4°	50	6	2	●	1	0.5	0.5	0.6	0.6
CRN2XLB0010N010S04	0.1	0.2	0.2	1	0.17	13.3°	50	4	2	●	1	1	1.1	1.2	1.3
CRN2XLB0010N010S06	0.1	0.2	0.2	1	0.17	13.8°	50	6	2	●	1	1	1.1	1.2	1.3
CRN2XLB0010N015S04	0.1	0.2	0.2	1.5	0.17	12.5°	50	4	2	●	1	1.5	1.6	1.7	1.9
CRN2XLB0010N015S06	0.1	0.2	0.2	1.5	0.17	13.3°	50	6	2	●	1	1.5	1.6	1.7	1.9
CRN2XLB0015N010S04	0.15	0.3	0.3	1	0.27	13.3°	50	4	2	●	1	1	1.1	1.2	1.3
CRN2XLB0015N010S06	0.15	0.3	0.3	1	0.27	13.9°	50	6	2	●	1	1	1.1	1.2	1.3
CRN2XLB0015N015S04	0.15	0.3	0.3	1.5	0.27	12.5°	50	4	2	●	1	1.5	1.6	1.7	1.9
CRN2XLB0015N015S06	0.15	0.3	0.3	1.5	0.27	13.3°	50	6	2	●	1	1.5	1.6	1.7	1.9
CRN2XLB0015N020S04	0.15	0.3	0.3	2	0.27	11.9°	50	4	2	●	1	2.1	2.2	2.3	2.5
CRN2XLB0015N020S06	0.15	0.3	0.3	2	0.27	12.8°	50	6	2	●	1	2.1	2.2	2.3	2.5
CRN2XLB0020N010S04	0.2	0.4	0.4	1	0.36	13.4°	50	4	2	●	1	1	1	1.1	1.2
CRN2XLB0020N010S06	0.2	0.4	0.4	1	0.36	13.9°	50	6	2	●	1	1	1	1.1	1.2
CRN2XLB0020N015S04	0.2	0.4	0.4	1.5	0.36	12.6°	50	4	2	●	1	1.5	1.6	1.7	1.8
CRN2XLB0020N015S06	0.2	0.4	0.4	1.5	0.36	13.4°	50	6	2	●	1	1.5	1.6	1.7	1.8
CRN2XLB0020N020S04	0.2	0.4	0.4	2	0.36	11.9°	50	4	2	●	1	2	2.1	2.3	2.5
CRN2XLB0020N020S06	0.2	0.4	0.4	2	0.36	12.8°	50	6	2	●	1	2	2.1	2.3	2.5
CRN2XLB0020N030S04	0.2	0.4	0.4	3	0.36	10.7°	50	4	2	●	1	3.1	3.2	3.4	3.7
CRN2XLB0020N030S06	0.2	0.4	0.4	3	0.36	11.9°	50	6	2	●	1	3.1	3.2	3.4	3.7
CRN2XLB0025N015S04	0.25	0.5	0.5	1.5	0.46	12.6°	50	4	2	●	1	1.5	1.6	1.7	1.8
CRN2XLB0025N015S06	0.25	0.5	0.5	1.5	0.46	13.4°	50	6	2	●	1	1.5	1.6	1.7	1.8