

製品情報

対象被削材




技術資料 >> 1982

ISO13399記号 >> 1966

マークの見方 >> 1607

ドリル選定目安表 >> 1608

(一般用)

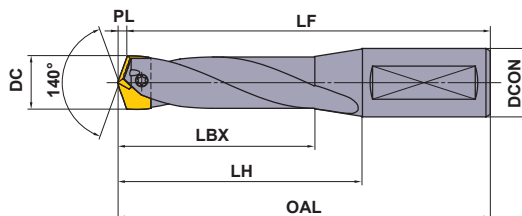

ホルダ規格

DC (mm)	加工穴深さ (l/d)	ホルダ		寸法 (mm)						クランプねじ	レンチ	プレート	焼付き防止剤	対応インサート			
		呼び記号	在庫	LBX	LH	OAL	LF	PL	DCON					DC (mm)	呼び記号	在庫	
														VP15TF	DP5010	VP10H	
18.5 19.4	3	TAWSN1900S25	●	71.4	102.4	158.4	155	3.4	25	WS304517T	TKY10T	WPT4405	MK1KS	18.5	TAWNH1850T	●	□
															TAWKH1850TG	●	□
														18.6	TAWNH1860T	●	□
															TAWKH1860TG	●	□
		18.7	TAWNH1870T	●	□												
			TAWKH1870TG	●	□												
		18.8	TAWNH1880T	●	□												
			TAWKH1880TG	●	□												
		18.9	TAWNH1890T	●	□												
			TAWKH1890TG	●	□												
		19.0	TAWNH1900T	●	□												
			TAWKH1900TG	●	□												
	19.1	TAWNH1910T	●	□													
		TAWKH1910TG	●	□													
	19.2	TAWNH1920T	●	□													
		TAWKH1920TG	●	□													
	19.3	TAWNH1930T	●	□													
		TAWKH1930TG	●	□													
	19.4	TAWNH1940T	●	□													
		TAWKH1940TG	●	□													
19.5 20.4	3	TAWSN2000S25	●	75.5	102.5	158.5	155	3.5	25	WS304518T	TKY10T	WPT4405	MK1KS	19.5	TAWNH1950T	●	□
															TAWKH1950TG	●	□
														19.6	TAWNH1960T	●	□
															TAWKH1960TG	●	□
		19.7	TAWNH1970T	●	□												
			TAWKH1970TG	●	□												
		19.8	TAWNH1980T	●	□												
			TAWKH1980TG	●	□												
		19.9	TAWNH1990T	●	□												
			TAWKH1990TG	●	□												
		20.0	TAWNH2000T	●	□												
			TAWKH2000TG	●	□												
	20.1	TAWNH2010T	□	□													
		TAWKH2010TG	□	□													
	20.2	TAWNH2020T	□	□													
		TAWKH2020TG	□	□													
	20.3	TAWNH2030T	□	□													
		TAWKH2030TG	□	□													
	20.4	TAWNH2040T	□	□													
		TAWKH2040TG	□	□													

注1 寸法はTAWNH(Hタイプ)インサートセット時です。

注2 規格品以外の特殊形状(例:径違い、長さ違い、面取り刃付きなど)、都度ご相談に応じさせていただきます。

●: 標準在庫品 □: 受注生産品