


ダイス鋼
SKD61
+
窒化処理

STRAIGHT EJECTOR PINS -P・L DIMENSION DESIGNATION TYPE-

ストレートエジェクタピン

-軸径・全長指定タイプ-

RoHS10

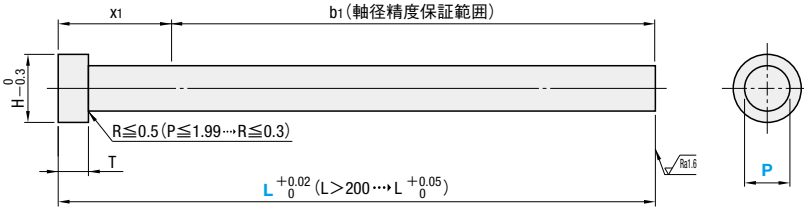

型式	ツバ厚	T公差
EPNB	4mm (T4)	0 -0.02
EPJB	6・8mm (JIS)	0 -0.05

P寸公差	
P ≤ 12.00	P > 12.00
-0.01 -0.02	-0.01 -0.03

M 材質 SKD61+窒化処理
 H 硬度 表面: 900HV~
 母材: 40~45HRC
 軸径精度・母材硬度・
 窒化表面硬度保証範囲 (詳細 P7)

ツバ厚4mm		ツバ厚JIS		型式		指定0.01mm単位						
H	T	H	T	Type		No.	L	P				
				ツバ厚4mm	ツバ厚JIS							
3	4	8	6	EPNB	-	1.5	40.00~200.00	1.00~ 1.49				
4						2	40.00~250.00	1.50~ 1.99				
5						2.5	40.00~400.00	2.00~ 2.49				
6						3		2.50~ 2.99				
7						3.5		3.00~ 3.49				
8						4		3.50~ 3.99				
8						6	8	EPJB	-	4.5	40.00~500.00	4.00~ 4.49
9										5		4.50~ 4.99
10										6		5.00~ 5.49
11										6.5		5.50~ 5.99
15	7	6.00~ 6.49										
17	8	6.50~ 6.99										
20	10	7.00~ 7.99										
21	12	8.00~ 9.99										
-	15	10.00~11.99										
-	16	12.00~14.99										
-	20	15.00~15.99										
-	25	16.00~19.99										
-	30	20.00~24.99										

⚠ P寸加工後に窒化処理を行うため、ツバ部にも窒化処理がかかる場合があります。



Order
注文例

型式 - L - P
EPJB 6 - 175.31 - P5.61



Delivery
出荷日

5 日日出荷



ストック B