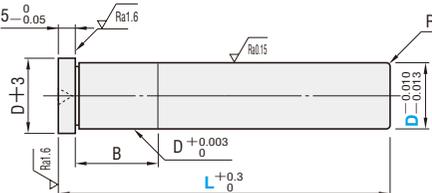
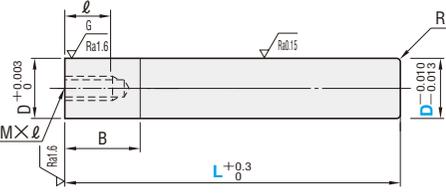
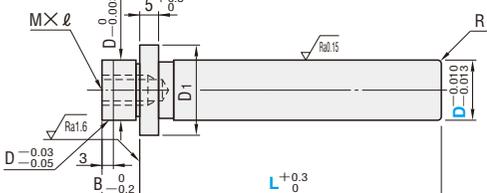


3μmレンジ ストリッパガイドピン

—ヘッド付きタイプ・ストレートタイプ・着脱タイプ—

 <p>RoHS10</p>	<p>TGPH (ヘッド付タイプ)</p>		<p>材質 SUJ2 硬度 58HRC ~</p>
 <p>RoHS10</p>	<p>TGPN (ストレートタイプ)</p>		<p>材質 SUJ2 硬度 58HRC ~</p>
 <p>RoHS10</p>	<p>TGPR (着脱タイプ)</p>		<p>材質 SUJ2 硬度 58HRC ~</p>

ストリッパ
ガイドピン・
ピン





TGPN M × ℓ Pitch	R	B	型式		L										
			Type	D	10	40	50	60	70	80	90	100	110	120	140
M5 × 12 P0.8	1.0	13	TGPH	10	40	50	60	70	80	90	100				
M6 × 15 P1.0	1.5	16 20		TGPN	13	50	60	70	80	90	100	110	120	140	
M8 × 20 P1.25	2.0	25	TGPN	20	70	80	90	100	110	120	140				
		28		25	70	80	90	100	110	120	140				

M × ℓ Pitch	D1	R	B	型式		L									
				Type	D	40	50	60	70	80	90	100			
M5 × 12 P0.8	16	1.0	8	TGPR	10	40	50	60							
M6 × 15 P1.0	20	1.5	10		13	40	50	60	70						
					16	40	50	60	70	80	90	100			
M8 × 20 P1.25	27	2.0	13		20	50	60	70	80	90	100				

Order 注文例
 型式 -

Delivery 出荷日
 •TGPH・TGPN
 在庫品
 •TGPR
 3 日目出荷 ストック A

Alterations 追加工
 型式 - - -
 3 日目出荷 ストック A

追加工	記号	詳細																	
	LC	L寸法変更 指定0.5mm単位 <table border="1"> <thead> <tr> <th rowspan="2">D</th> <th colspan="2">LC</th> </tr> <tr> <th>TGPH・TGPN</th> <th>TGPR</th> </tr> </thead> <tbody> <tr> <td>10</td> <td>30 ≤ LC < L</td> <td>30 ≤ LC < L</td> </tr> <tr> <td>13・16</td> <td>40 ≤ LC < L</td> <td>40 ≤ LC < L</td> </tr> <tr> <td>20</td> <td>60 ≤ LC < L</td> <td>50 ≤ LC < L</td> </tr> <tr> <td>25</td> <td>60 ≤ LC < L</td> <td>-</td> </tr> </tbody> </table>	D	LC		TGPH・TGPN	TGPR	10	30 ≤ LC < L	30 ≤ LC < L	13・16	40 ≤ LC < L	40 ≤ LC < L	20	60 ≤ LC < L	50 ≤ LC < L	25	60 ≤ LC < L	-
D	LC																		
	TGPH・TGPN	TGPR																	
10	30 ≤ LC < L	30 ≤ LC < L																	
13・16	40 ≤ LC < L	40 ≤ LC < L																	
20	60 ≤ LC < L	50 ≤ LC < L																	
25	60 ≤ LC < L	-																	
	TC	ツバ厚変更 2 ≤ TC < 5 指定0.1mm単位 ◎全長Lは(5-TC)分短くなります。 LC併用の場合、全長はLCと同じです。 (5-TC) ≤ Lmax-LC) ◎TGPHのみ適用																	
	BC	B寸法変更 指定1mm単位 5 ≤ BC < B ◎TGPRのみ適用 ◎Mタップ深さは(B-BC)分短くなります																	
	GC	ピン先端にテーバ加工します。 <table border="1"> <thead> <tr> <th>D</th> <th>Y</th> </tr> </thead> <tbody> <tr> <td>10</td> <td>3</td> </tr> <tr> <td>13</td> <td>3</td> </tr> <tr> <td>16</td> <td>5</td> </tr> <tr> <td>20</td> <td>5</td> </tr> <tr> <td>25</td> <td>5</td> </tr> </tbody> </table>	D	Y	10	3	13	3	16	5	20	5	25	5					
D	Y																		
10	3																		
13	3																		
16	5																		
20	5																		
25	5																		
	RC	先端R変更 <table border="1"> <thead> <tr> <th>D</th> <th>標準R</th> <th>RC(選択)</th> </tr> </thead> <tbody> <tr> <td>10</td> <td>1.0</td> <td>1.5・2.0</td> </tr> <tr> <td>13・16</td> <td>1.5</td> <td>2.0・2.5</td> </tr> <tr> <td>20・25</td> <td>2.0</td> <td>2.5・3.0</td> </tr> </tbody> </table>	D	標準R	RC(選択)	10	1.0	1.5・2.0	13・16	1.5	2.0・2.5	20・25	2.0	2.5・3.0					
D	標準R	RC(選択)																	
10	1.0	1.5・2.0																	
13・16	1.5	2.0・2.5																	
20・25	2.0	2.5・3.0																	