
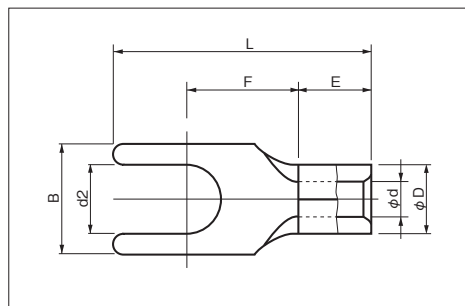


■Y形

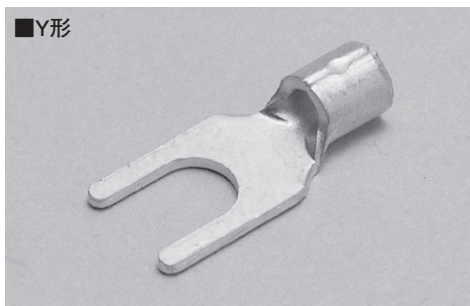

RoHS 10

P2をご確認ください

品番	各部の寸法 mm						電線抱合範囲			適用工具		包装個数				
	d2	B	L	F	E	φD	φd	単線mm	燃線mm <sup>2</sup>	AWG	本体		ヘッド			
0.3Y-2 ○	2.2	5.2	12.0	4.9	4.5	2.2	1.0	-	0.2~0.5 0.3~0.5 UL・CSA 指定	24-20 22-20 UL・CSA 指定	NH 69		1,000 (100×10)			
0.3Y-3 ○	3.2															
0.3Y-3.5N ○	3.7															
0.3Y-4N ○	4.3															
0.3Y-5 ○	5.3															
0.75Y-3 ○	3.2	5.6	14.5	5.8	4.5	2.5	1.4	-	0.3 ∩ 0.75	22-18	NH 69		1,000 (100×10)			
0.75Y-3.5 ○	3.7															
0.75Y-4 ○	4.3															
1.25Y-2.5 ○	2.7	5.6	11.7	5.1	4.5	3.4	1.7	0.57 ∩ 1.44	0.25 ∩ 1.65	22-16	NH 1 NH 69		1,000 (100×10)			
1.25Y-3K ○	3.2										5.6	15.0		5.8		
1.25Y-3S ○											5.7	11.9		4.8		
1.25Y-3 ○											5.8	15.0		5.8		
1.25Y-3N ○												16.0		6.6		
1.25Y-3.5K ○	3.7										5.6	15.0		5.8		
1.25Y-3.5 ○											5.8	16.0		6.8		
1.25Y-3L ○											6.2	16.0		6.8		
1.25Y-4N ○	4.3										6.4	16.4		6.6		
1.25Y-4S ○											7.0			7.6		
1.25Y-4M ○		8.1	7.5													
1.25Y-4L ○		9.6	17.5	8.3												
1.25Y-5 ○	5.3	11.0	19.0	8.6	4.5	4.2	2.3	1.14 ∩ 1.82	1.04 ∩ 2.63	16-14	NH 1 NH 9 NH 69		1,000 (100×10)			
1.25Y-6 ○	6.4															
2Y-3S	3.2										5.6	15.8		6.6		
2Y-3 ○											5.9					
2Y-3.5K	3.7										5.6	16.0		7.6		
2Y-3.5S ○											5.8					
2Y-3.5 ○											6.4				16.0	7.0
2Y-3.5L ○																
2Y-4N ○	4.3	7.0	17.1	7.1												
2Y-4S ○		8.0		8.7												
2Y-4 ○		10.0		7.1												
2Y-4M ○	5.3	8.0	18.0	8.5												
2Y-5 ○		10.0			8.7											
2Y-5M ○		12.0			8.6											
2Y-5L ○	6.4	14.0	22.0	11.5	4.5	4.2	2.3	1.14 ∩ 1.82	1.04 ∩ 2.63	16-14	NH 1 NH 9 NH 69		1,000 (100×10)			
2Y-6 ○											8.0					
2Y-8 ○	8.4	14.0	22.0	11.5												

注1) ○ : UL・CSA登録品

2) UL・CSA登録品「電線被覆ムキ寸法」についてはP14をご覧ください。

3) 先開形1.25Y-3Sの接触部形状は右図の丸形となります。

