


穴用C形止め輪 《RTW-6~65》

適用する穴

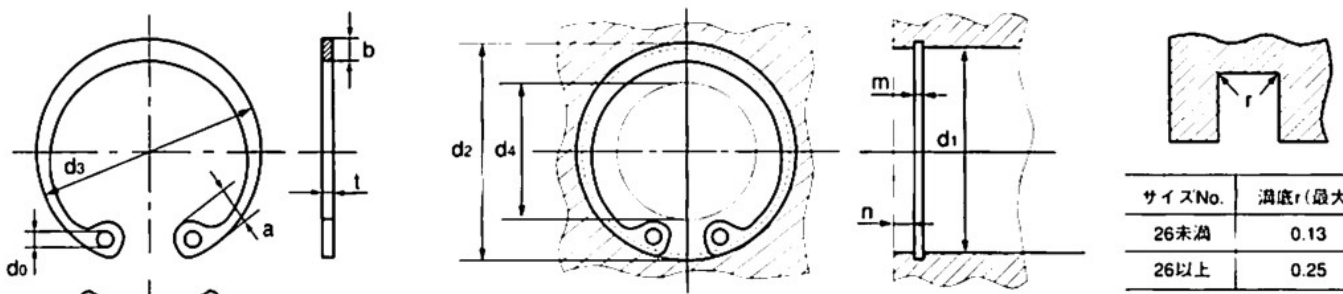

サイズNo.170以上

d4は止め輪をd1にはめる時の円周の最小径
(クリアランス内径)

単位: mm

サイズNo.	止 め 輪							d4 (参考)	適 用 す る 穴							
	d3		t		b	a	d0		d1	d2		m		参考n		
	基本寸法	公差	基本寸法	公差	約	約	最小			基本寸法	公差	基本寸法	公差	最小		
RTW-※ 6	6.7	±0.18	0.4	±0.03	0.7	1.6	0.8	2.5	6	6.25	+0.04	0.5	+0.1	0.5		
※ 7	7.7		0.4		0.8	1.7	0.8	3	7	7.3	0.5					
※ 8	8.8		0.4		0.9	1.7	0.8	3.5	8	8.4	+0.06	0.5				
※ 9	9.8		0.6	±0.04	1.1	2.2	0.8	4	9	9.4	0	0.7	0	0.6		
※ 10	10.7		1	±0.05	1.5	2.8	1.2	4	10	10.4	+0.11	1.15	+0.14	0.6		
※ 11	11.8		1		1.5	3	1.2	4	11	11.4		1.15				
※ 12	13		1		1.7	3.1	1.5	5	12	12.5		1.15				
※ 13	14.1		1		1.7	3.1	1.5	6	13	13.6		1.15				
※ 14	15.1		1		1.9	3.6	1.7	7	14	14.6		1.15				
※ 15	16.2		1		1.9	3.6	1.7	8	15	15.7		1.15				
※ 16	17.3		1		1.9	3.7	1.7	8	16	16.8	1.15					
※ 17	18.3		1		1.9	3.8	1.7	9	17	17.8	1.15					
※ 18	19.5		1		2.4	4	1.7	10	18	19	1.15					
19	20.5		1		2.5	4	2	11	19	20	1.15					
20	21.5		1		2.5	4	2	12	20	21	1.15					
21	22.5		±0.2		1	2.5	4.1	2	12	21	22	+0.21		1.15	1.5	
22	23.5		1		2.5	4.1	2	13	22	23	0	1.15		1.5		
24	25.9		1.2		±0.06	2.5	4.3	2	15	24	25.2	+0.25		1.35	0	1.8
25	26.9	1.2	3			4.4	2	16	25	26.2	1.35					
26	27.9	1.2	3			4.6	2	16	26	27.2	1.35					
28	30.1	1.2	3			4.6	2	18	28	29.4	1.35					
30	32.1	1.2	3			4.7	2	20	30	31.4	1.35					
32	34.4	1.2	3.5	5.2		2.5	21	32	33.7	1.35						
34	36.5	±0.25	1.5	±0.07	3.5	5.2	2.5	23	34	35.7	+0.3	0	2.6			
35	37.8	1.5	3.5		5.2	2.5	24	35	37	1.65			3.0			
36	38.8	1.5	3.5		5.2	2.5	25	36	38	1.65			3.0			
37	39.8	1.5	3.5		5.2	2.5	26	37	39	1.65			3.0			
38	40.8	1.5	4		5.3	2.5	27	38	40	1.65			3.0			
○ 40	43.5	±0.4	1.75		4	5.7	2.5	28	40	42.5			1.9	3.8		
○ 42	45.5		1.75		4	5.8	2.5	30	42	44.5			1.9	3.8		
○ 45	48.5		1.75		4.5	5.9	2.5	33	45	47.5			1.9	3.8		
※ 46	49.7	1.75	±0.45		5	6.1	2.5	33	46	48.5			+0.3	0	3.8	
○ 47	50.5	1.75			4.5	6.1	2.5	34	47	49.5					1.9	3.8
○ 48	51.5	1.75			4.5	6.2	2.5	35	48	50.5					1.9	3.8
50	54.2	2			4.5	6.5	2.5	37	50	53					2.2	4.5
52	56.2	2		5.1	6.5	2.5	39	52	55	2.2	4.5					
55	59.2	2		5.1	6.5	2.5	41	55	58	2.2	4.5					
56	60.2	2		5.1	6.6	2.5	42	56	59	2.2	4.5					
58	62.2	2		5.1	6.8	2.5	44	58	61	2.2	4.5					
60	64.2	2		5.5	6.8	2.5	46	60	63	2.2	4.5					
62	66.2	2		5.5	6.9	2.5	48	62	65	2.2	4.5					
63	67.2	2		5.5	6.9	2.5	49	63	66	2.2	4.5					
65	69.2	2.5		±0.08	5.5	7	2.5	50	65	68	2.7	4.5				