


■ プラグ・ソケットセットタイプ

AKC-F メネジストレート

RoHS対応

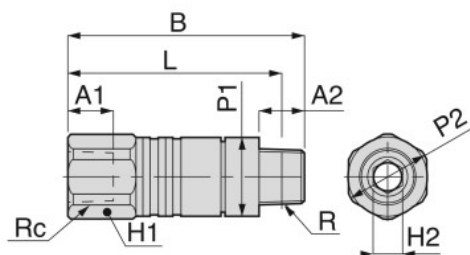


単位：mm

形 式	Rc	R	A1	A2	B	L	P1	P2	対辺 H1	対辺 H2	質量 (g)	オリフィス (mm)	CAD ファイル名
AKC08-01F01	Rc1/8	R1/8	7	8	40.9	36.9	15	-	14	5	36	5.3	AKC08-01F01
AKC08-01F02		R1/4		11	42.4	36.4				6	39	6.1	AKC08-01F02
AKC08-02F01	Rc1/4	R1/8	9.5	8	48.9	44.9	15	18	17	5	47	5.3	AKC08-02F01
AKC08-02F02		R1/4		11	50.4	44.4				6	51	6.1	AKC08-02F02
AKC10-01F01	Rc1/8	R1/8	7	8	42.3	38.3	18	-	17	5	54	5.3	AKC10-01F01
AKC10-01F02		R1/4		11	44.3					38			8
AKC10-01F03		R3/8		12		AKC10-01F03							
AKC10-01F04		R1/2		15	47.3	39.1	22			83	AKC10-01F04		
AKC10-02F01	Rc1/4	R1/8	9.5	8	49.3	45.3	18	-	17	5	60	5.3	AKC10-02F01
AKC10-02F02		R1/4		11	51.3					45			8
AKC10-02F03		R3/8		12		AKC10-02F03							
AKC10-02F04		R1/2		15	54.3	46.1	22			88	AKC10-02F04		
AKC10-03F01	Rc3/8	R1/8	10.5	8	55.3	51.3	18	23.5	21	5	76	5.3	AKC10-03F01
AKC10-03F02		R1/4		11	57.3					51			8
AKC10-03F03		R3/8		12		AKC10-03F03							
AKC10-03F04		R1/2		15	60.3	52.1	22			105	AKC10-03F04		

AKC-B ホース用継手付ストレート

RoHS対応

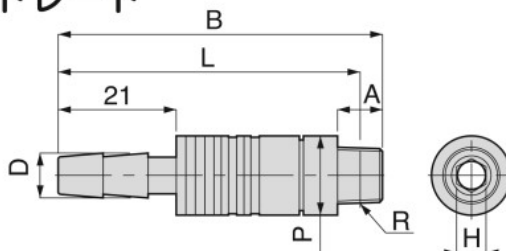

単位：mm

形 式	耐熱ホース 内径	D	R	A	B	L	P	対辺 H	質量 (g)	オリフィス径 (mm)	CAD ファイル名
AKC08-ID06B01	6.3	8	R1/8	8	55.9	51.9	15	5	38	4.5	AKC08-ID06B01
AKC08-ID06B02			R1/4	11	57.4	51.4		6	41		AKC08-ID06B02
AKC08-ID09B01	9.5	12	R1/8	8	55.9	51.9	15	5	42	5.3	AKC08-ID09B01
AKC08-ID09B02			R1/4	11	57.4	51.4		6	46	6	AKC08-ID09B02
AKC10-ID06B01	6.3	8	R1/8	8	61.3	57.3	18	5	61	4.5	AKC10-ID06B01
AKC10-ID06B02			R1/4	11	63.3			57	8		62
AKC10-ID06B03			R3/8	12		68					AKC10-ID06B03
AKC10-ID06B04			R1/2	15	66.3	58.1	22	84			AKC10-ID06B04
AKC10-ID09B01	9.5	12	R1/8	8	61.3	57.3	18	5	61	5.3	AKC10-ID09B01
AKC10-ID09B02			R1/4	11	63.3			57		8	68
AKC10-ID09B03			R3/8	12		89			AKC10-ID09B03		
AKC10-ID09B04			R1/2	15	66.3	58.1	22	AKC10-ID09B04			

本ページ共通の注意事項

※L寸法は、ねじ締付け後の参考寸法です。