

六角ボルト(半ねじ)



B0000010
鉄

B0240010
SNB7

B0010010
黄銅

B0020010
ステンレス


B0110010
SUS 316

B0120010
SUS 316L

B0130010
SUS 310S

B0060010
アルミ

B0090010
チタン

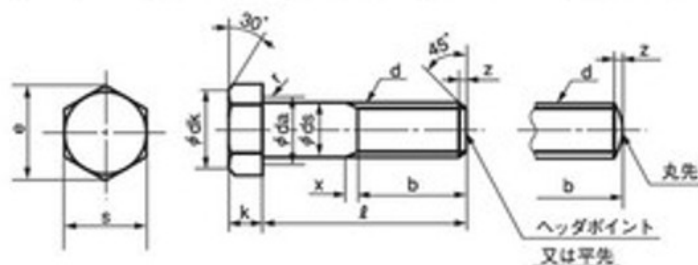

単位mm

ねじの呼び (d)	ds			k			S			e	dk	r	ds		z	
	基準寸法	許容差	許容差	基準寸法	許容差	許容差	基準寸法	許容差	許容差				約	最小		上・中
M3	3			2			5.5									
(M3.5)	3.5			2.4	±0.1		6									
M4	4			2.8			7									
(M4.5)	4.5	0 -0.1		3.2			8	0 -0.2								
M5	5			3.5			8									
M6	6			4	±0.15		10	0 -0.6	0 -0.6							
(M7)	7	0 -0.15		5		±0.25	11	0 -0.25	0 -0.7							
M8	8			5.5		±0.6	13									
M10	10			7			17									
M12	12			8		±0.3	19									
(M14)	14	0 -0.2		9		±0.8	22	0 -0.35	0 -0.8							
M16	16			10	±0.2		24									
(M18)	18			12			27									
M20	20	0 -0.2		13		±0.35	30									
(M22)	22			14		±0.9	32									
M24	24			15			36	0 -0.4	0 -1.0	0 -1.0						
(M27)	27			17			41									
M30	30			19			46									
(M33)	33			21			50									
M36	36			23	±0.25	±0.4	55									
(M39)	39	0 -0.25		25		±1.0	60									
M42	42			26			65	0 -0.45	0 -1.2	0 -1.2						
(M45)	45			28			70									
M48	48			30			75									
(M52)	52			33			80									
M56	56			35			85									
(M60)	60	0 -0.3		38		±0.5	90									
M64	64			40			95									
(M68)	68			43			100	0 -0.55	0 -1.4							
M72	72			45			105									
(M76)	76			48			110									
M80	80			50			115									

小ねじ

マメスクリねじ

組込みねじ

タッピングねじ

タングタイト

ハイテックねじ

いたすら防止ねじ

建材用スクリュー

ボルト

キャップボルト

ドリルねじ

座金

つまみねじ

ナット

樹脂製品

アンカーボルト