


▶ CoroDrill® DS20 刃先交換式ドリル 4×DC

円筒平取り付きシャンク ISO 9766 準拠
内部給油

ドリル径 15.00 - 40.00 mm

KAPR=81°

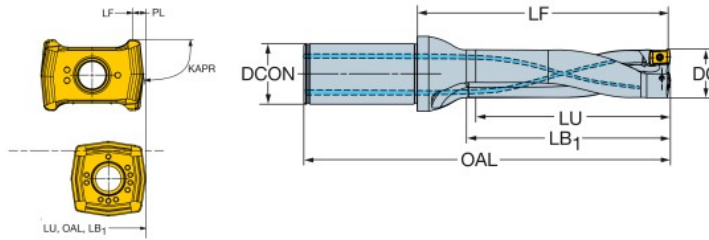

ドリル径 mm	シャンク径 mm	型番	寸法, mm					部 品			適用 チップ	半径方向 の調整量 (最大)	最大径 DC max	重量 (kg)
			DC	DCON	LF	OAL	LB1	LU	PL	①チップ スクリュー				
4×DC														
15.00	20	DS20-D1500L20-04	80.69	131	63	60	0.46	5513 020-27	5680 084-17 (6IP)	5680 105-01	DS20-01...P DS20-01...C	1.00	17.00	0.190
15.50		DS20-D1550L20-04	82.53	131	63	62	0.46					1.00	17.50	0.193
16.00		DS20-D1600L20-04	84.69	135	67	64	0.46					0.75	17.50	0.200
16.50		DS20-D1650L20-04	84.53	135	67	66	0.46					0.75	18.00	0.203
17.00		DS20-D1700L20-04	88.69	139	71	68	0.46					0.50	18.00	0.211
17.50		DS20-D1750L25-04	94.53	151	73	70	0.46					0.50	18.50	0.337
18.00		DS20-D1800L25-04	96.69	153	75	72	0.46					0.25	18.50	0.348
18.50		DS20-D1850L25-04	96.53	153	75	72	0.46					0.25	19.00	0.349
19.00		DS20-D1900L25-04	100.62	157	79	76	0.55					1.06	21.12	0.348
19.50		DS20-D1950L25-04	100.44	157	79	79	0.55					1.06	21.62	0.362
20.00	25	DS20-D2000L25-04	104.62	161	83	80	0.55	5513 020-88	5680 084-18 (7IP)	5680 105-01	DS20-02...P DS20-02...C	0.82	21.64	0.364
21.00		DS20-D2100L25-04	108.62	165	87	84	0.55					0.58	22.16	0.381
22.00		DS20-D2200L25-04	112.62	169	91	88	0.55					0.34	22.68	0.401
23.00		DS20-D2300L25-04	117.53	174	96	92	0.66					1.30	25.60	0.417
24.00		DS20-D2400L25-04	121.53	178	100	96	0.66					1.10	26.20	0.439
25.00		DS20-D2500L25-04	125.53	182	104	100	0.66					0.90	26.80	0.463
26.00		DS20-D2600L32-04	133.53	194	108	104	0.66					0.70	27.40	0.705
27.00		DS20-D2700L32-04	136.53	197	112	108	0.66					0.50	28.00	0.734
28.00		DS20-D2800L32-04	140.16	201	116	112	0.83					2.12	32.24	0.743
29.00		DS20-D2900L32-04	144.16	205	120	116	0.83					1.84	32.68	0.773
30.00	32	DS20-D3000L32-04	148.16	209	124	120	0.83	5513 020-57	5680 084-20 (9IP)	5680 105-02	DS20-04...P DS20-04...C	1.56	33.12	0.805
31.00		DS20-D3100L40-04	158.16	229	128	124	0.83					1.28	33.56	1.250
32.00		DS20-D3200L40-04	162.16	233	132	128	0.83					1.00	34.00	1.286
33.00		DS20-D3300L40-04	165.16	236	136	132	0.83					0.72	34.44	1.313
34.00		DS20-D3400L40-04	169.28	240	140	136	1.00					2.16	38.32	1.354
35.00		DS20-D3500L40-04	173.28	244	144	140	1.00					1.92	38.84	1.398
36.00		DS20-D3600L40-04	177.28	248	148	144	1.00					1.68	39.36	1.443
37.00		DS20-D3700L40-04	181.28	252	152	148	1.00					1.44	39.88	1.492
38.00		DS20-D3800L40-04	185.28	256	156	152	1.00					1.20	40.40	1.543
39.00		DS20-D3900L40-04	189.28	260	160	156	1.00					0.96	40.92	1.597
40.00	40	DS20-D4000L40-04	193.28	264	164	160	1.00	416.1-833	5680 084-21 (10IP)	5680 105-02	DS20-05...P DS20-05...C	0.72	41.44	1.654
41.00		DS20-D4100L40-04	197.28	269	169	164	1.27					3.73	48.46	1.750
42.00		DS20-D4200L50-04	208.72	290	173	168	1.27					3.46	48.92	2.578
43.00		DS20-D4300L50-04	212.72	294	177	172	1.27					3.19	49.38	2.654
44.00		DS20-D4400L50-04	216.72	298	181	176	1.27					2.92	49.84	2.733
45.00		DS20-D4500L50-04	220.72	302	185	180	1.27					2.65	50.30	2.816
46.00		DS20-D4600L50-04	224.72	306	189	184	1.27					2.38	50.76	2.902
47.00		DS20-D4700L50-04	227.72	309	193	188	1.27					2.11	51.22	2.968
48.00		DS20-D4800L50-04	231.72	313	197	192	1.27					1.84	51.68	3.061
49.00		DS20-D4900L50-04	235.72	317	201	196	1.27					1.57	52.14	3.158
50.00	50	DS20-D5000L50-04	239.72	321	205	200	1.27	416.1-834	5680 084-15 (15IP)	5680 105-02	DS20-06...P DS20-06...C	1.30	52.60	3.259
51.00		DS20-D5100L50-04	243.72	325	209	204	1.27					1.03	53.06	3.363
52.00		DS20-D5200L50-04	247.72	329	213	208	1.27					0.76	53.52	3.472
53.00		DS20-D5300L50-04	251.41	333	217	212	1.58					4.21	61.42	3.459
54.00		DS20-D5400L50-04	255.41	337	221	216	1.58					3.92	61.84	3.573
55.00		DS20-D5500L50-04	259.41	341	225	220	1.58					3.63	62.26	3.694
56.00		DS20-D5600L50-04	263.41	345	229	224	1.58					3.34	62.68	3.827
57.00		DS20-D5700L50-04	267.41	349	233	228	1.58					3.05	63.10	3.957
58.00		DS20-D5800L50-04	271.41	353	237	232	1.58					2.76	63.52	4.300
59.00		DS20-D5900L50-04	274.41	356	241	236	1.58					2.47	63.94	4.146
60.00	50	DS20-D6000L50-04	278.41	360	245	240	1.58	416.1-834	5680 084-15 (15IP)	5680 105-02	DS20-07...P DS20-07...C	2.18	64.36	4.350
61.00		DS20-D6100L50-04	282.41	364	249	244	1.58					1.89	64.78	4.498
62.00		DS20-D6200L50-04	286.41	368	253	248	1.58					1.60	65.20	4.651
63.00		DS20-D6300L50-04	290.41	372	257	252	1.58					1.31	65.62	4.806
64.00		DS20-D6400L50-04	295.41	377	261	256	1.58					1.02	66.04	4.848
65.00		DS20-D6500L50-04	299.41	381	265	260	1.58					0.73	66.46	5.167

¹⁾ 調整機能付トルクハンドルは別途注文品です。

注文例: DS20-D1500L20-04 2個

部品

チップサイズ	チップスクリュー(同梱)	ビット(トルクスプラス)(同梱)	トルク値(Nm)	調整機能付トルクハンドル [*]
01	5513 020-27	5680 084-17 (6IP)	0.6	5680 105-01
02	5513 020-88	5680 084-18 (7IP)	0.9	5680 105-01
03	5513 020-58	5680 084-18 (7IP)	0.9	5680 105-01
04	5513 020-57	5680 084-20 (9IP)	1.4	5680 105-02
05	416.1-833	5680 084-21 (10IP)	2.0	5680 105-02
06	416.1-834	5680 084-15 (15IP)	3.0	5680 105-02
07	416.1-834	5680 084-15 (15IP)	3.0	5680 105-02

