




異径チーズ:KGT




適用チューブ 外径mm		型式	φD1	φD2	L1	L2	Q	M1	M2	有効断面積 mm ²		質量 g
(a)	(b)									ナイロン	ウレタン	
4	6	KGT04-06	12.8	10.4	19.5	18	4.5	17	16	7.1	6.5	5
6	8	KGT06-08	15.2	12.8	22.5	20	5.3	18.5	17	16.4	16.4	8
8	10	KGT08-10	18.5	15.2	26.5	23	6	21	18.5	36	27.2	14
10	12	KGT10-12	20.9	18.5	28.5	26.5	6.8	22	21	56	44.5	21

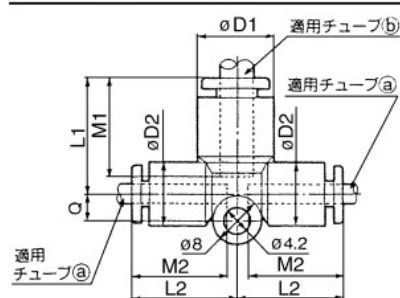


サービスチーズユニオン: KGY

〈M5の場合〉

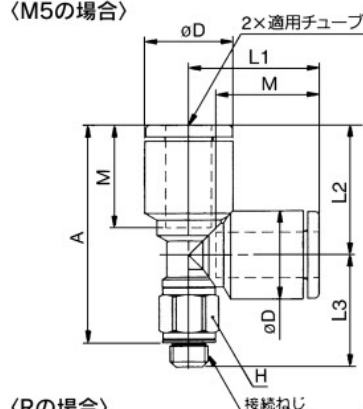

〈Rの場合〉

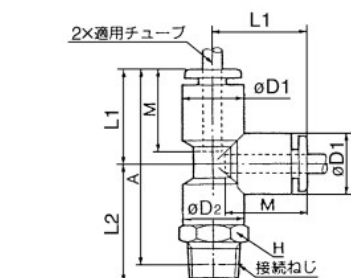


適用チューブ外径 mm	接続ねじ M R	型式	H (六角 対辺)	φD1	φD2	L1	L2	L3	※A	M	注1)有効断面積 mm ²		質量 g
											ナイロン	ウレタン	
4	M5×0.8	KGY04-M5	7	9.3	—	15.6	14.8	13.7	25.4	12.7	4.6	4.6	3.5
	1/8	KGY04-01	10	10.4	10	18	21.1	—	36	16	6.4	4.4	13
	1/4	KGY04-02	14				25.5		38				19
6	M5×0.8	KGY06-M5	7	11.6	—	17.1	17.1	14.7	28.7	13.5	4.6	4.6	4.3
	1/8	KGY06-01	10	12.8	10	20	22.1	—	39	17	13.4	10.6	12
	1/4	KGY06-02	14				26.5		41				20
	3/8	KGY06-03	17				27.9		42.5				34
8	1/8	KGY08-01	12	15.2	12	23	23.6		—	43.5	17	13.4	10.6
	1/4	KGY08-02	14				28	45.5		22			
	3/8	KGY08-03	17				29.4	47		36			
10	1/8	KGY10-01	17	18.5	17	26.5	26.1	—		49.5	21	40.0	28.4
	1/4	KGY10-02					29.5		50.5	29			
	3/8	KGY10-03					30.9		52	39			
	1/2	KGY10-04					22		35.1	54.5			
12	1/4	KGY12-02	17	20.9	17	28.5	30.5	—	53.5	22	57.4	45.4	31
	3/8	KGY12-03					31.9		55				41
	1/2	KGY12-04					22		36.1				57.5
16	3/8	KGY16-03	22	26.5	20.9	34	36.9		—	65.5	25	81	(81)
	1/2	KGY16-04					40.1	67		113		(113)	116

※Rねじのねじ込み後の参考寸法
注1) ()内寸法はソフトナイロンの場合




デルタユニオン:KGD

〈M5の場合〉

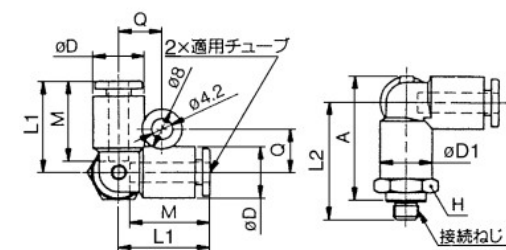

〈Rの場合〉

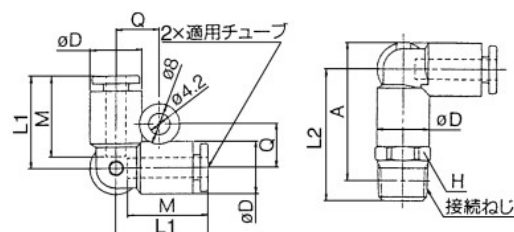

適用チューブ外径 mm	接続ねじ M R	型式	H (六角 対辺)	φD	L1	L2	※A	M	Q	有効断面積 mm ²		質量 g
										ナイロン	ウレタン	
4	M5×0.8	KGD04-M5	11	10.4	18.5	24	25.5	16	8.7	4.3	4.3	10
	1/8	KGD04-01				25.6	27.5			6.0	6.0	12
	1/4	KGD04-02				30	30			21		
6	M5×0.8	KGD06-M5	13	12.8	20.5	26	28.5	17	9.9	4.3	4.3	12
	1/8	KGD06-01				28.1	31.5			14		
	1/4	KGD06-02				32	33			21		
	3/8	KGD06-03				33.4	34.5			34		
8	1/8	KGD08-01	17	15.2	23.5	32.6	37	18.5	11.1	26.3	18.2	26
	1/4	KGD08-02				36	38					35
	3/8	KGD08-03				36.4	38.5					
10	1/4	KGD10-02	19	18.5	26.5	39	43	21	12.8	40.8	29.0	39
	3/8	KGD10-03				39.4	43.5					40
	1/2	KGD10-04				43.1	45					62
12	1/4	KGD12-02	22	20.9	28.5	41.5	46.5	22	13.9	57.2	45.2	55
	3/8	KGD12-03				41.9	47					56
	1/2	KGD12-04				45.1	48.5					63

※Rねじのねじ込み後の参考寸法