




ミスミ

RING GAUGE

鋼リングゲージ

●0.1mm単位指定ラップ仕上げ

RG-G

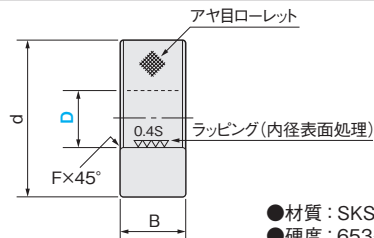

●材質: SKS3
●硬度: 653~772HV

1個単位

型番	呼び寸法 D 0.1mm単位指定		d	B	F	¥通常単価 1個
	No.					
RG-G	1	1.0	22	4	0.3	10,030
	2	1.1~2.5				10,030
	3	2.6~3.0		9,490		
	4	3.1~4.0		8,960		
	5	4.1~5.0		8,420		
	6	5.1~6.0	32	8	0.5	8,420
	7	6.1~7.0				8,160
	8	7.1~8.0				8,160
	9	8.1~9.0				7,620
	10	9.1~10.0				7,620
	11	10.1~11.0	38	10		8,160
	12	11.1~12.0				8,160
	13	12.1~13.0				8,420
	14	13.1~14.0				8,420
	15	14.1~15.0				8,830
	16	15.1~16.0	45	12	8,830	
	17	16.1~17.0			9,090	
	18	17.1~18.0			9,090	
	19	18.1~19.0			9,630	
	20	19.1~20.0			9,630	
	21	20.1~21.0	53	14	10,300	
	22	21.1~22.0			10,300	
	23	22.1~23.0			10,560	
	24	23.1~24.0			10,560	
	25	24.1~25.0			11,100	
	26	25.1~26.0	63	16	11,100	
	27	26.1~27.0			11,100	
	28	27.1~28.0			11,100	
	29	28.1~29.0			11,770	
	30	29.1~30.0			11,770	
	31	30.1~31.0	71	18	11,770	
	32	31.1~32.0			11,770	
	33	32.1~33.0			12,030	
	34	33.1~34.0			12,030	
	35	34.1~35.0			13,100	
	36	35.1~36.0	85	20	13,100	
	37	36.1~37.0			13,100	
	38	37.1~38.0			13,100	
	39	38.1~39.0			13,100	
	40	39.1~40.0			13,100	
	41	40.1~41.0	85	20	13,900	
	42	41.1~42.0			13,900	
	43	42.1~43.0			14,840	
	44	43.1~44.0			14,840	
	45	44.1~45.0			14,970	
	46	45.1~46.0			14,970	
	47	46.1~47.0			15,370	
	48	47.1~48.0			15,370	
	49	48.1~49.0			16,040	
	50	49.1~50.0			16,040	

型番	呼び寸法 D 0.5mm単位指定		d	B	F	¥通常単価 1個
	No.					
RG-G	51	50.5~51.0	100	24	1.5	18,450
	52	51.5~52.0				18,450
	53	52.5~53.0				18,450
	54	53.5~54.0				18,450
	55	54.5~55.0				18,450
	56	55.5~56.0				19,380
	57	56.5~57.0				19,380
	58	57.5~58.0				19,380
	59	58.5~59.0				19,380
	60	59.5~60.0				19,380
	61	60.5~61.0	112			20,720
	62	61.5~62.0				20,720
	63	62.5~63.0				20,720
	64	63.5~64.0				20,720
	65	64.5~65.0				20,720
	66	65.5~66.0				22,730
	67	66.5~67.0				22,730
	68	67.5~68.0				22,730
	69	68.5~69.0				22,730
	70	69.5~70.0				22,730
	71	70.5~71.0	125			22,730
	72	71.5~72.0				22,730
	73	72.5~73.0				22,730
	74	73.5~74.0				22,730
	75	74.5~75.0				22,730
	76	75.5~76.0				22,730
	77	76.5~77.0				22,730
	78	77.5~78.0				22,730
	79	78.5~79.0				22,730
	80	79.5~80.0				22,730
	81	80.5~81.0	140			28,070
	82	81.5~82.0				28,070
	83	82.5~83.0				28,070
	84	83.5~84.0				28,070
	85	84.5~85.0				28,070
	86	85.5~86.0				28,070
	87	86.5~87.0				28,070
	88	87.5~88.0				28,070
	89	88.5~89.0				28,070
	90	89.5~90.0				28,070
	91	90.5~91.0	160			34,090
	92	91.5~92.0				34,090
	93	92.5~93.0				34,090
	94	93.5~94.0				34,090
	95	94.5~95.0				34,090
	96	95.5~96.0				34,090
	97	96.5~97.0				34,090
	98	97.5~98.0				34,090
	99	98.5~99.0				34,090
	100	99.5~100.0				34,090