


MFH 高送りカッタ

MFH Harrier フェースミル

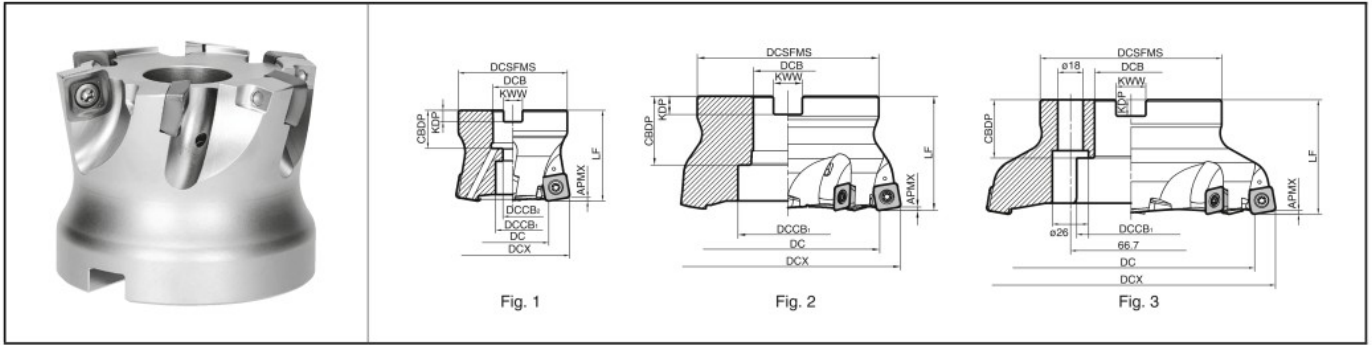

● ホルダ寸法 (SOMT10タイプ)

インロー	型番	在庫	刃数	寸法 (mm)														すくい角 A.R.	ク ホ ラ ン ト	形状	重量 (kg)	最高回転数 (min ⁻¹)
				DCX	DC			DCSFMS	DCB	DCCB ₁	DCCB ₂	LF	CBDP	KDP	KWW	APMX	APMX ₂ ^{*1}					
インチ仕様	MFH 050R-10-4T	●	4	50	33	37.5	36.5	47	22.225	19	11	50	19	5	8.4	1.5	1.2	+10°	有	Fig.1	0.4	10,000
	MFH 050R-10-5T	●	5																			
	MFH 063R-10-5T	●	5	63	46	50.5	49.5	60														
	MFH 063R-10-6T	●	6																			
	MFH 080R-10-7T	●	7	80	63	67.5	66.5	76														
ミリ仕様	MFH 050R-10-4T-M	●	4	50	33	37.5	36.5	47	22	19	11	50	21	6.3	10.4	1.5	1.2	+10°	有	Fig.1	0.4	10,000
	MFH 050R-10-5T-M	●	5																			
	MFH 063R-10-5T-22M	●	5	63	46	50.5	49.5	60														
	MFH 063R-10-6T-22M	●	6																			
	MFH 063R-10-5T-27M	●	5	27	20	13	63	24														
	MFH 063R-10-6T-27M	●	6																			
	MFH 080R-10-7T-M	●	7	80	63	67.5	66.5	76	27	20	13	63	24	7	12.4							

*1. APMX₂は次頁参照

*2. () 内寸法はLD型チップ装着時を示す

● ホルダ寸法 (SOMT14タイプ)

インロー	型番	在庫	刃数	寸法 (mm)														すくい角 A.R.	ク ホ ラ ン ト	形状	重量 (kg)	最高回転数 (min ⁻¹)
				DCX	DC			DCSFMS	DCB	DCCB ₁	DCCB ₂	LF	CBDP	KDP	KWW	APMX	APMX ₂ ^{*1}					
インチ仕様	MFH 050R-14-4T	●	4	50	27	33	32	47	22.225	19	11	50	19	5	8.4	2	2	+10°	有	Fig.1	0.4	8,800
	MFH 063R-14-4T	●	4																			
	MFH 063R-14-5T	●	5	63	40	46	45	60														
	MFH 080R-14-5T	●	5																			
	MFH 080R-14-6T	●	6	80	57	63	62	76														
	MFH 100R-14-6T	●	6																			
	MFH 100R-14-7T	●	7	100	77	83	82	96	50.8	72	-	63	38	10	15.9							
	MFH 125R-14-7T	●	7																			
MFH 160R-14-8T	●	8	160	137	143	142	100	50.8	72	-	63	38	11	19.1								
ミリ仕様	MFH 050R-14-4T-M	●	4	50	27	33	32	47	22	19	11	50	21	6.3	10.4	2	2	+10°	有	Fig.1	0.4	8,800
	MFH 063R-14-4T-22M	●	4																			
	MFH 063R-14-5T-22M	●	5	63	40	46	45	60														
	MFH 063R-14-4T-27M	●	4																			
	MFH 063R-14-5T-27M	●	5	27	20	13	63	24														
	MFH 080R-14-5T-M	●	5																			
	MFH 080R-14-6T-M	●	6	80	57	63	62	76	32	26	17	63	28	8	14.4							
	MFH 100R-14-6T-M	●	6																			
	MFH 100R-14-7T-M	●	7	100	77	83	82	96	33	9	16.4											
	MFH 125R-14-7T-M	●	7																			
MFH 160R-14-8T-M	●	8	160	137	143	142	100	40	55	-	63	32	9	16.4								

*1. APMX₂は次頁参照

*2. () 内寸法はLD型チップ装着時を示す

M

ミーリング

チップ

コーナ角 45°~20°

コーナ角 15°

コーナ角 0°/2°

高送りカッタ

仕上げ加工カッタ

3次元エンドミル

スロットミル

ボールラジラス

その他

●: 標準在庫