


## VEE\*\*R...

4, 5, 6枚刃、荒加工用、波刃形状

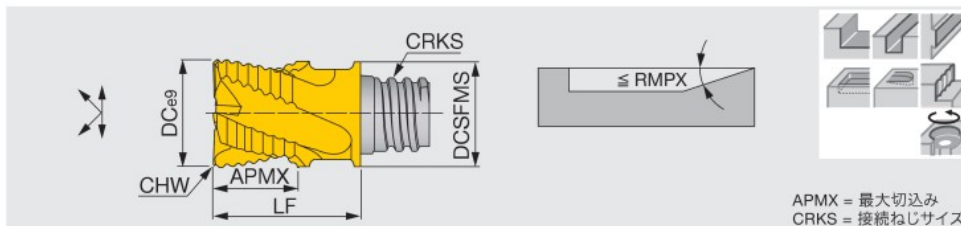


形番	AH715	AH725	NOF	FHA	DC	DCSFMS	APMX	CHW	CRKS	LF	RMPX	スパナ	トルク*
VEE080L05.0C25R04S05		●	4	45°	8	7.7	5	0.25	S05	10	5°	KEYV-S05	7
VEE100L07.0C30R04S06		●	4	45°	10	9.7	7	0.3	S06	13	5°	KEYV-S06	10
VEE120L09.0C35R04S08	●	●	4	45°	12	11.7	9	0.35	S08	16.5	5°	KEYV-S08	15
VEE160L12.0C40R05S10	●	●	5	45°	16	15.3	12	0.4	S10	20.5	5°	KEYV-S10	28
VEE200L15.0C40R06S12	●	●	6	45°	20	18.3	15	0.4	S12	25.5	3°	KEYV-S12	28
VEE250L22.0C50R06S15	●	●	6	45°	25	23.9	22	0.5	S15	37	3°	KEYV-W20	40

\*トルク：推奨締付トルク(N-m)  
VEE080 - VEE200: 1ケース2個入り  
VEE250: 1ケース1個入り

●: 設定アイテム

## VED\*\*R...

4, 5, 6枚刃、荒加工用、長刃長、波刃形状

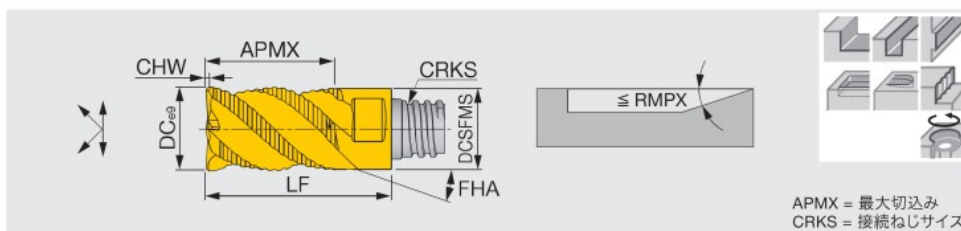

形番	AH725	NOF	FHA	DC	DCSFMS	APMX	CHW	CRKS	LF	RMPX	スパナ	トルク*
VED080L12.0C25R04S05	●	4	47°	8	7.7	12	0.25	S05	18	5°	KEYV-S05	7
VED100L15.0C30R04S06	●	4	47°	10	9.6	15	0.3	S06	22	5°	KEYV-S06	10
VED120L18.0C35R04S08	●	4	47°	12	11.7	18	0.35	S08	27	5°	KEYV-S08	15
VED160L24.0C40R05S10	●	5	47°	16	15.3	24	0.4	S10	33.5	5°	KEYV-S10	28
VED200L30.0C40R06S12	●	6	47°	20	18.45	30	0.4	S12	41	3°	KEYV-S12	28
VED250L37.0C50I06S15	●	6	47°	25	23.9	37	0.5	S15	52.5	3°	KEYV-W20	40

\*トルク：推奨締付けトルク(N-m)  
VED080 - VED160: 1ケース2個入り  
VED200, VED250: 1ケース1個入り

●: 新製品